
## **Scope**Protect Universal endoscope tip guard

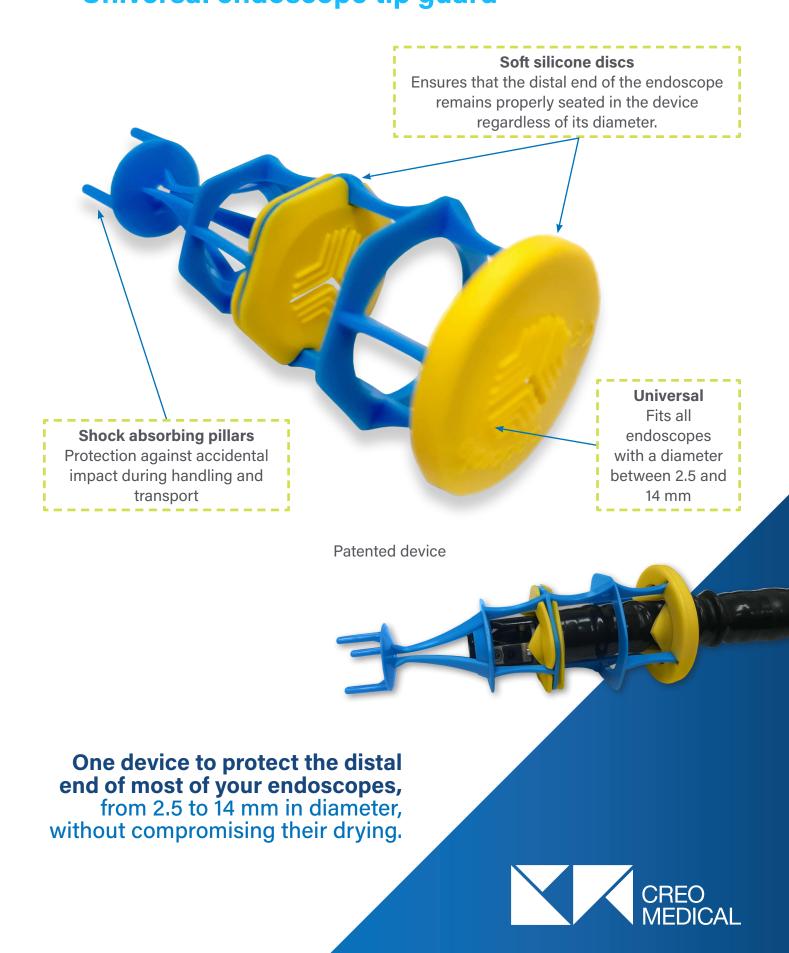


## ScopeProtect Single-use universal tip cover for endoscopes

The distal end of endoscopes consists of components that can be easily damaged by shocks during transport and storage, resulting in costly repairs. In addition, micro-scratches and scratches can harbour blood, tissue and bacteria, posing a risk of cross-contamination between patients.

**Scope**Protect provides a solution to these problems, as it protects the distal end of a wide variety of flexible endoscopes (gastroscopes, colonoscopes, duodenoscopes, echo-endoscopes, bronchoscopes, cystoscopes, ureteroscopes) while allowing the evacuation of residual moisture and thus drying the endoscope.

ScopeProtect protects the endoscope tip when :

- Its transfer from the AER (Automatic Endoscope Reprocessor) to a drying cabinet or other storage device
- Its placement and removal from a drying cabinet
- Its transfer from a drying cabinet or other storage device to the transport system

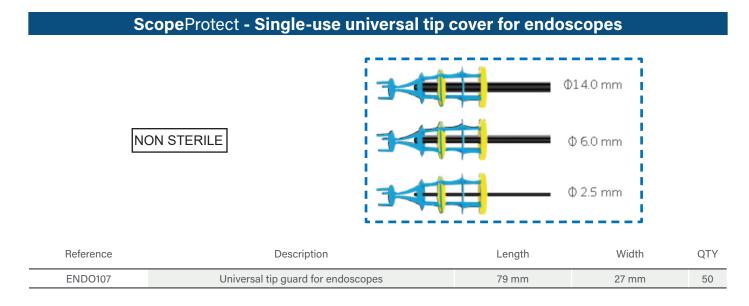

## **Characteristics**

- Universal: the ScopeProtect device is compatible with all endoscopes with an external diameter of 2.5 to 14 mm (gastroscopes, colonoscopes, duodenoscopes, echo-endoscopes, bronchoscopes, cystoscopes, ureteroscopes).
- Single use for a consistently effective product and a significant reduction in the risk of nosocomial infections.
- **Traceability**: 3 detachable self-adhesive labels accompany each device.

Description: Endoscope end protection, ScopeProtect. Indications: For use to protect the distal end of the endoscope during transport and storage. Class: I non-sterile Notified body: CE Certificate of Conformity. Manufacturer: GA Health Company Limited. Correct use: Before use, carefully read the instructions in the package insert or device labelling. Version: SP\_E\_2. Rev.02 Date 16-09-022

Creo Medical authorised local distributor **Creo Medical UK Ltd** Chestnut House, N.Minster Business Pk. YO26 6QR York, United Kingdom **Email:** info.uk@creomedical.com **Tel:** +44 (0) 1904 786888 Technical changes and mistakes reserved. Images may show non standard options

